
## Instructions for online tracking on web server

Open web server www.gpstrackerxy.com, you will see following interface.




Choose the you would like to use, for free imei, only server 1 is available, and imei with paid license can use either one, but server 2 is recommended.


After click either server, you will see following interface:

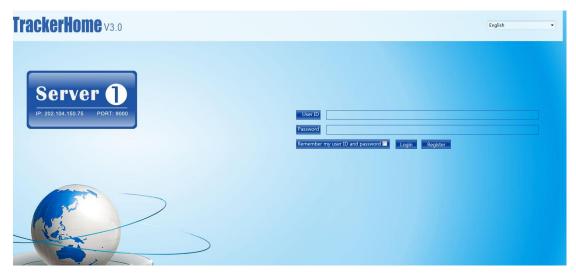


1. Click language column to choose language

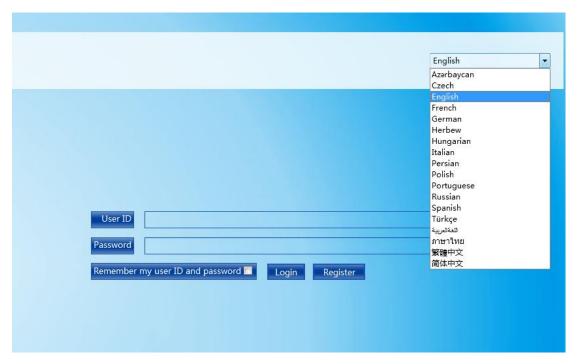


2. Click register to register your account; file your user name and password and imei of your tracker.




3. After register your account, you can login and go to "terminal management" to add your tracker to your account

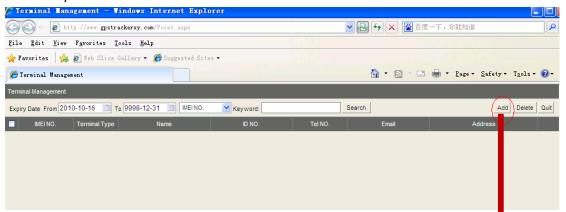

4. File the imei No. choose terminal type and name the tracker, others like, id no. Tel no. as no sense, you can leave it blank, and click "√" to save it. Of course, the imei you added need our authentication, and all the trackers opened with one month free time to testing on server.

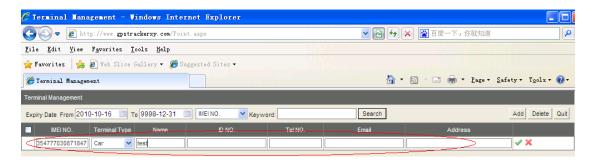


5. After save it, you can see your tracker in the terminal list as following:

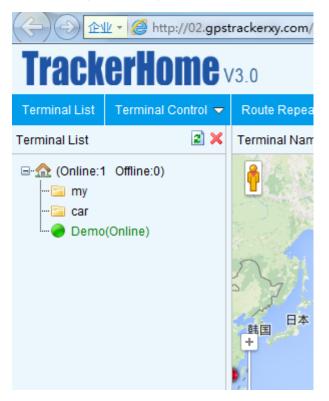

- 6. Call your wireless operator to active the GPRS service(internet capabilities) for your simcard and get the correct APN for configurations.
  - 6.1 send apn123456 cmnet (take china mobile for example), you will received apn ok.[format: apn+password+space+apn name]
  - 6.2 Send adminip123456 202.104.150.75 9000 if use trial server, if you never configured another IP, this step can be skipped, because the default settings is 202.104.150.75 and port is 9000. You will received adminip ok if you do it.[format: adminip+password+space+202.104.150.75+space+port.]
  - 6.3 If your gprs service need user name and password, please configure as following, GPRS service doesn't need user name and password in most of the countries.

    [format: up+password+space +username+space+password] note: user name and password is the gprs login user name and password. E.g Send up123456 web web, you will receive user password ok.
  - 6.4 Send gprs123456, you will receive GPRS OK. [Formate: gprs+password].
- 7. After GPRS ok, you go back to your account, and you will see your tracker is "online"

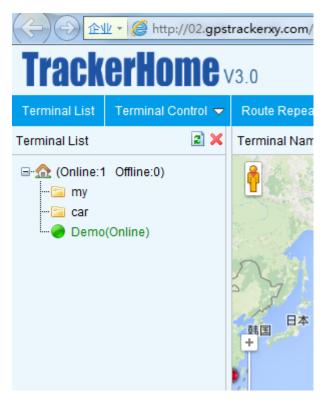


8. Click the tracker in the terminal list, tracker will update the coordinates one time




9. You can click menu" track" to setup the multi continuously tracking.



10. Click menu" time" to setup your local time zone for tracker.

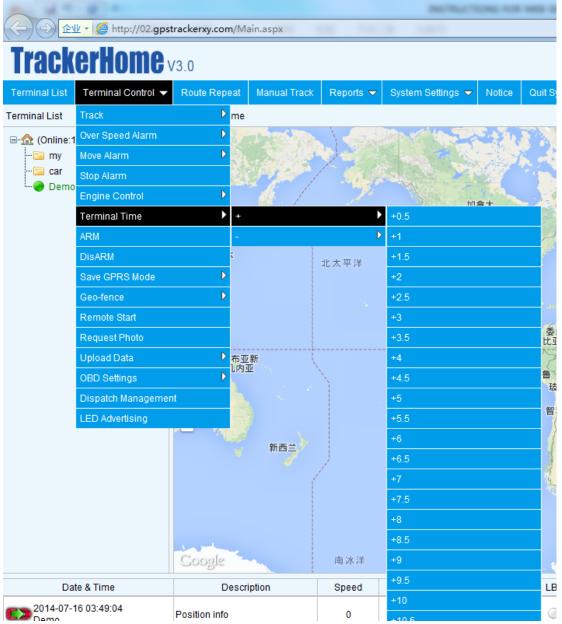

12. Click menu "alarm log" to view the history data and alarms, and you can also export to excel or KML or GPX, KML and GPX file can be opened in google earth to show you the route your vehicle passed pay.

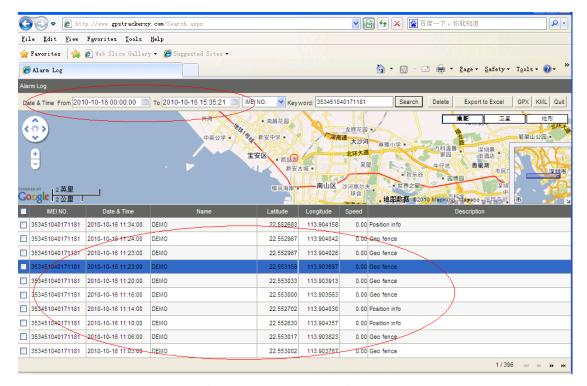

11. Sub-account, you can click" account management" menu to open sub-account for your clients.



11.1 click menu " add " to open sub-account. And click permission to give permissions for sub account, for example, there is two sub account in my account, test1 and test 2, click permission, you will see following pictures:

